



## Rocker switches



### A1 Series

**Square cut out - 19X13**  
**ENEC electrical rating up to 13A**







- Illuminated or not
- Intermediate switch version available
- Momentary switch version available
- Applications: small appliances

#### Products

#### Accessories

*Customising on demand*


## Electrical features

ENEC electrical rating up to	<b>13A</b>
Electro-mechanical cycles number up to	<b>50.000</b>
Room temperature up to	<b>125 °C</b>
Flammability	<b>UL 94 V2</b>
Heat and fire resistance	<b>GWFI 850 °C</b> <b>GWIT 750 °C on demand</b>
Contact gap	<b>≥ 3 mm</b>
Approvals available (to check according to the rating of each single material code)	     
Reference standards	<b>EN 61058</b> <b>UL 1054</b>

## Wiring diagrams

- Illuminated single-pole switch semi-dependent light
- Normally closed single-pole momentary switch
- Normally opened single-pole momentary switch
- Single-pole intermediate switch
- Single-pole intermediate switch 1 momentary position
- Single-pole intermediate switch 2 momentary positions
- Single-pole switch
- Single-pole two-way momentary switch
- Single-pole two-way switch

## Cut out (mm)

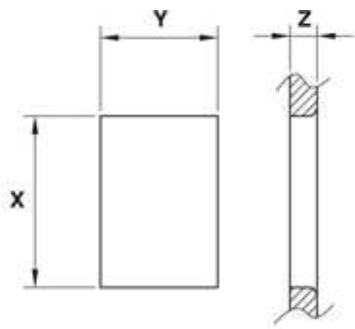

Z	Y	X
0.7 ... 1.25	$13.0 \pm 0.1$	$19.0 + 0.1$
1.25 ... 2	$13.0 \pm 0.1$	$19.3 + 0.2$
2.0 ... 3	$13.0 \pm 0.1$	$19.6 + 0.2$

Stampa scheda