



Rocker switches



A4 Series

Square cut out - 19X22
ENEC electrical rating up to 13A






- Illuminated or not
- IP protection degree increased by A4PRT
- Push-button version available
- Applications: vacuum cleaners, HVAC

Products

Accessories

Customising on demand


Electrical features

ENEC electrical rating up to	13A
Electro-mechanical cycles number up to	50.000
Room temperature up to	125 °C
Flammability	UL 94 V2
Heat and fire resistance	GWFI 850 °C GWIT 750 °C on demand
Contact gap	≥ 3 mm
Approvals available (to check according to the rating of each single material code)	    
Reference standards	EN 61058 UL 1054

Wiring diagrams

- Double-pole intermediate switch
- Double-pole intermediate switch 1 momentary position
- Double-pole intermediate switch 2 momentary positions
- Double-pole switch
- Double-pole two-way switch
- Illuminated double-pole switch
- Single-pole intermediate switch
- Single-pole momentary switch
- Single-pole switch

Cut out (mm)

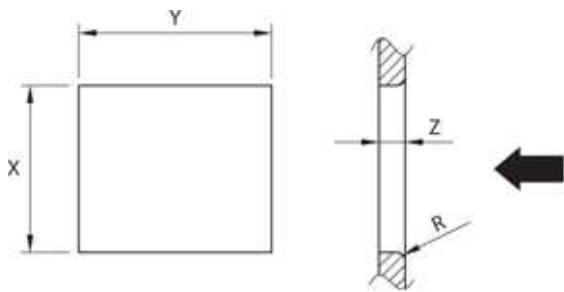

Z	Y	X
0.7 ... 1.25	22.0 ± 0.1	19.0 $\begin{smallmatrix} +0.2 \\ 0 \end{smallmatrix}$
1.25 ... 2.0	22.0 ± 0.1	19.3 $\begin{smallmatrix} +0.2 \\ 0 \end{smallmatrix}$
2.0 ... 3.0	22.0 ± 0.1	19.6 $\begin{smallmatrix} +0.2 \\ 0 \end{smallmatrix}$

Stampa scheda