



Water-resistant switches



B4MASK Series

Square cut out - 30X22
ENEC electrical rating up to 16A





- IP65 protection degree
- Intermediate switch with central O available
- Patented
- Applications: outdoor electrical equipments, pumps, high pressure cleaners

Customising on demand

Products

Accessories


Electrical features

ENEC electrical rating up to	16A
Electro-mechanical cycles number up to	50.000
Room temperature up to	120 °C
Flammability	UL 94 V2
Heat and fire resistance	GWFI 850 °C GWIT 750 °C on demand
Contact gap	≥ 3 mm
Approvals available (to check according to the rating of each single material code)	   
Reference standards	EN 61058 UL 1054

Wiring diagrams

- Double-pole intermediate switch
- Double-pole switch
- Illuminated double-pole switch

Cut out (mm)

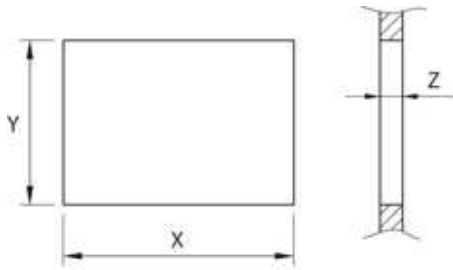

Z	Y	X
0.7 ... 1.25	22.0 ^{+0.2} ₀	30.2 ±0.1
1.25 ... 2.0	22.0 ^{+0.2} ₀	30.6 ±0.1
2.0 ... 3.0	22.0 ^{+0.2} ₀	30.8 ±0.1

Stampa scheda