



FASCETTE CABLE TIES

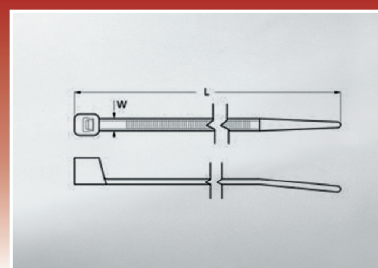

Materiale: nylon PA6.6 - UL94V2 - T: da -40°C a +105°C
Material: nylon PA6.6 - UL94V2 - T: from -40°C to +105°C

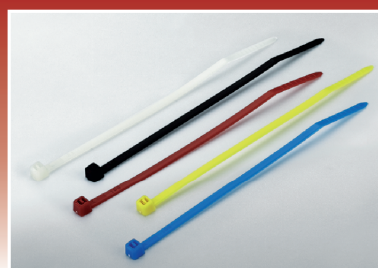

CODICE CODE	DESCRIZIONE DESCRIPTION	LUNGHEZZA mm LENGHT mm	LARGHEZZA mm WIDTH mm	ø MAX FASCIO mm MAX BUNDLE ø mm	CONFEZIONE PACKING	IMBALLO BOX
70090...	OK-90M	96		23	100/1.000	40.000
70100...	OK-100M	100		25	100/1.000	35.000
70120...	OK-120M	120		30	100/1.000	35.000
70140...	OK-140M	142	2,5	35	100/1.000	20.000
70165...	OK-165M	165		44	100/1.000	22.000
70200...	OK-200M	203		55	100/1.000	22.000
71140...	OK-140I	142		35	100/1.000	12.000
71150...	OK-150I	150		39	100/1.000	16.000
71180...	OK-180I	180		49	100/1.000	10.000
71200...	OK-200I	203	3,6	55	100/1.000	10.000
71250...	OK-250I	250		74	100/1.000	9.000
71300...	OK-300I	300		85	100/1.000	9.000
71370...	OK-370I	368		102	100/1.000	7.000
72120...	OK-120S	120		30	100/1.000	12.000
72160...	OK-160S	160		42	100/1.000	8.000
72190...	OK-190S	190		52	100/1.000	10.000
72200...	OK-200S	203		55	100/1.000	10.000
72250...	OK-250S	250	4,6	74	100/1.000	6.000
72280...	OK-280S	280		81	100/1.000	6.000
72300...	OK-300S	300		85	100/1.000	6.000
72370...	OK-370S	368		102	100/1.000	5.000
72385...	OK-385S	385		116	100/1.000	5.000
72430...	OK-430S	432		125	100/1.000	5.000

.. COLORI: -01 nero (B) / -02 giallo (YL) / -03 blu (BL) / -04 verde (GN) / -05 rosso (RD) / -06 grigio (GY) / -08 arancio (OR) / -10 bianco (W) / -18 viola (PP) / -19 giallo fosforescente (FGL)

.. COLOURS: -01 black (B) / -02 yellow (YL) / -03 blue (BL) / -04 green (GN) / -05 red (RD) / -06 grey (GY) / -08 orange (OR) / -10 white (W) / -18 purple (PP) / -19 fluorescence yellow (FGL)