




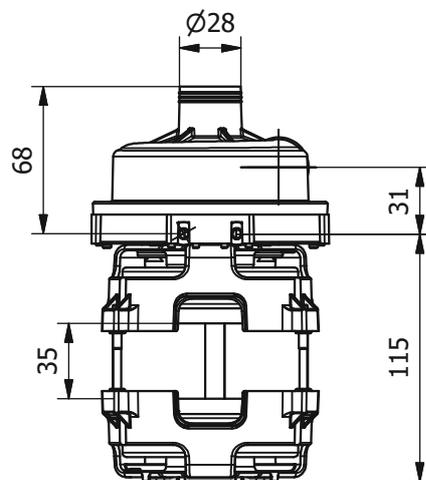


CRC - R

kW **0.20** Hm **8.5 max**
 HP **0.15** L/1' **40 max**

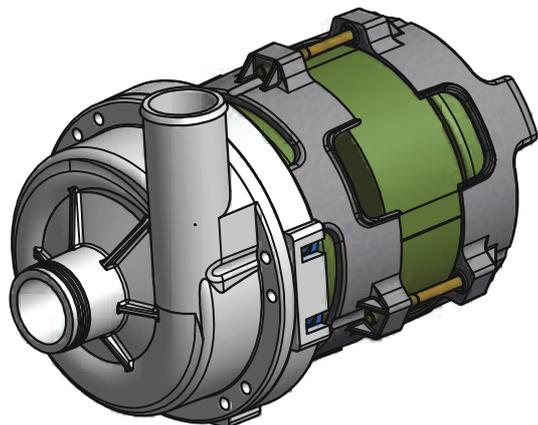

CRC-R DX :
 disponibile anche con Ø 12
 available also with Ø 12

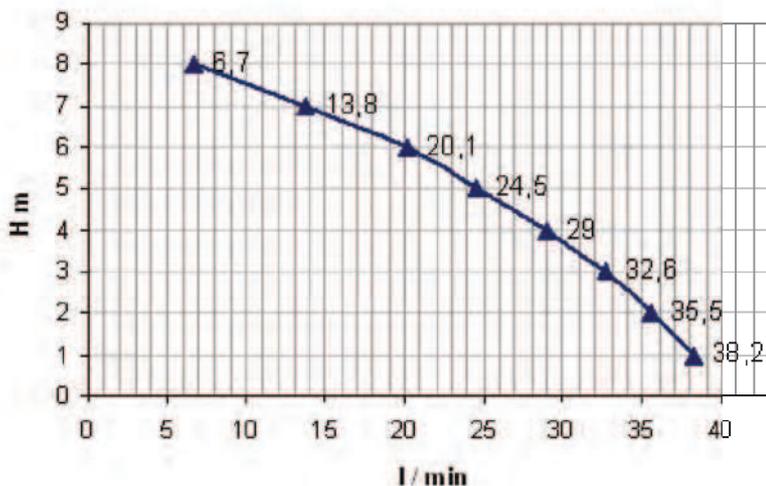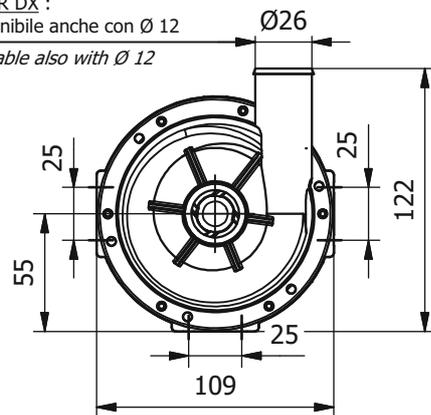


Potenza motore Motor power	HP	0.15	kW	0.20
Tensione Tension	(V)	230		
Frequenza Frequency	(Hz)	50		
Corrente assorbita Power consumption	(A)	0.9		
RPM		2800		
Condensatore Capacitor	(µF)	4		
Protezione termica Thermal Overload	(°C)	160°C		

Materiali idraulica Wet end materials	
Corpo Pompa Pump Body	PP 30 GF
Girante Impeller	PP 30 GF
Albero Motore Motor Shaft	AISI 416
Tenuta Meccanica Mechanical Seal	GRAFITE/CERAMICA CARBON/CERAMIC



Sono disponibili pompe sia con mandata a SX che a DX. Pumps with SX (left) or DX (right) pressure sides are available.



>> 90° >>>
 Possibile rotazione corpo pompa. Possible pressure side rotation

I motori standard sono conformi alle norme europee vigenti, su richiesta l'isolamento potrà essere conforme alla registrazione Underwriter Laboratories "DV-155-J E327568".

Standard motors are in conformity to Euro - Norms, on request insulations conform to Underwriter Registration E.I.S. "DV-155-J E327568" are available.

Classe isolamento Insulation class		F
Grado protezione Protection class	(IP)	X0
Servizio Duty		S1
Peso Weight	(kg)	1.9

LGB si riserva il diritto di apportare modifiche tecniche in qualsiasi momento e senza preavviso. LGB reserves the right to make technical changes at any time without notice.