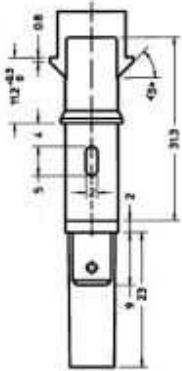

















Signal lights: Signal lights Cut-out Ø 8-10 | SX218



Hole

Ø 9



Wiring diagrams	Approvals	Connections
<div><p>with Led A.C. current including ballast and diode</p></div> <div><p>with Led A.C. current including ballast and diode</p></div> <div><p>with Led D.C. current or A.C. low voltage including ballast</p></div> <div><p>with incandescent lamp</p></div> <div><p>with neon or fluorescent lamp and ballast</p></div> <div><p>with neon or fluorescent lamp</p></div>	<div></div> <div></div> <div></div>	<div></div> <div></div> <div></div> <div></div>

Temperature: From T75° C to T150° C according to the version
Colour: Red, orange, green, blue, colourless. Other colours available on customer's request
Wire ends and connectors: PVC or silicone cables, available pre-stripped wires end 6,5 mm or with clamped connectors
Light source : LED: available for every voltage;
Incandescence: 12V - 24V;
Neon: from 125V.

Stampa scheda