

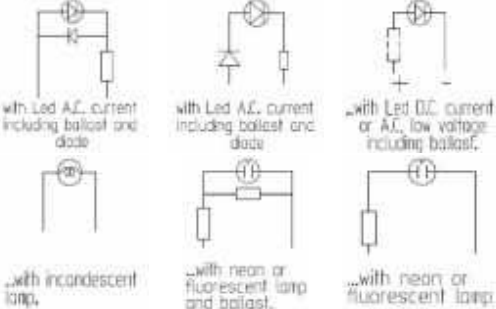


Signal lights: Signal lights Cut-out Ø 12-14 | SX41



Hole Ø 12

Panel thickness 0.8 - 2.0 mm



Wiring diagrams	Approvals	Connections
 <p>with Led AC current including ballast and diode</p> <p>with Led AC current including ballast and diode</p> <p>with Led DC current or AC, low voltage including ballast.</p> <p>with incandescent lamp.</p> <p>with neon or fluorescent lamp and ballast.</p> <p>with neon or fluorescent lamp.</p>		

Temperature: From T75 °C to T150 °C according to the version

Colour: Red, orange, green, blue, colourless. Other colours available on customer's request

Wire ends and connectors: -

Light source : LED: available for every voltage;
 Incandescence: 12V - 24V;
 Neon: from 125V.

Stampa scheda