




Signal lights: Signal lights Cut-out Ø 12-14 | SX51



Hole Ø 12
Panel thickness 0.5 - 6.5 mm

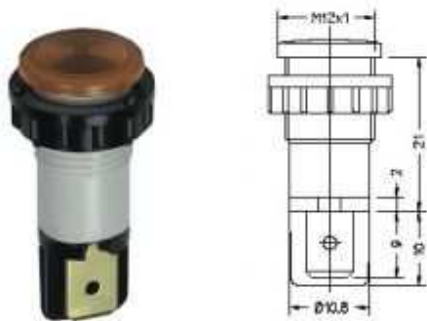

Wiring diagrams	Approvals	Connections
<div><p>with Led A.C. current including ballast and diode</p><p>with Led A.C. current including ballast and diode</p><p>with Led D.C. current or A.C. low voltage including ballast</p><p>with incandescent lamp</p><p>with neon or fluorescent lamp and ballast</p><p>with neon or fluorescent lamp</p></div>	<div>  </div>	<div></div>

Temperature: From T75° C to T150° C according to the version
Colour: Red, orange, green, blue, colourless. Other colours available on customer's request
Wire ends and connectors: -
Light source : LED: available for every voltage;
Incandescence: 12V - 24V;
Neon: from 125V.

Stampa scheda