


Signalling various units

TB/SLTS

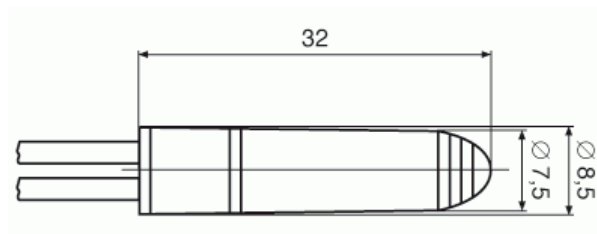

YOU CAN REQUEST IT WITH IP65 (TOTALLY WATERPROOF)

Light indicator with conical lens to be locked in the panel hole 10 - 12 - 13mm diameter.

It can be assembled with the following types of lens: SRZ - SDY - SDK - SFY.

Working voltage	6V ; 12V ; 24V ; 48V ; 110V ; 250V ; 400V
Max temperature	90°C ; 120°C ; 150°C
Lamp type	incandescent lamp ; neon/fluorescent lamp ; LED lamp lamp
Connection way	pvc cable ; silicon cable ; silicon-glass cable
Wire ends	on request
Lens type	conical
Lens – case connection	fixed
Approvals	VDE - UL/CSA - CE