Signal lights: Signalling units | SX214

Wiring diagrams	Approvals	Connections
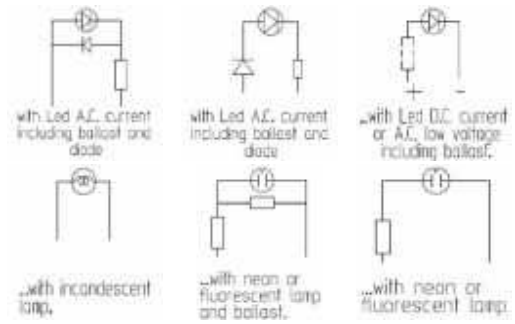		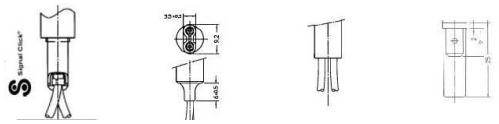

Temperature: From T75° C to T150° C according to the version
Colour: Red, orange, green, blue, colourless. Other colours available on customer's request
Wire ends and connectors: PVC or silicone cables, available pre-stripped wires end 6.5 mm or with clamped connectors
Light source : LED: available for every voltage;
Incandescence: 12V - 24V;
Neon: from 125V.

Stampa scheda