



PA268

**Cable clamp.
For snap-in fixing on chassis**



TECHNICAL DATA


		IEC Standards			American Standards			
			A	B	C	D	E	F
Dimensions / Versions mm (inches)	RO	45 (1.77)	31 (1.22)	8 (0.31)	15 (0.59)	21 (0.83)	20 (0.79)	
	SQ			7 (0.28)				
Versions		RO: for round fixing holes; SQ: for square fixing holes						
Wire size		3 x 0.75 sqmm ÷ 5 x 6.0 sqmm (max. cable Ø 20 mm)			3 x 20 AWG ÷ 3 x 10 AWG (max. cable Ø 0.8")			
Working Temperature		- 5 ÷ 125°C (short time 155°C)			23 ÷ 221°F			
Plastic Material		Polyamide PA6 black colour, UL94 V2, GWT 850°C						
Cable Clamp Screw		3.5 x 25 mm (0.14" x 1.00") HI-LO						
Approvals	File Nr.	Ratings (sqmm/AWG – V – A – T)			Standard References			
	E 6170	Gr. 6.5/20 mm - 3x0.75 sqmm / 5x6.0 sqmm			EN 60598-1 /A1; /A12; /A13; EN 60335-1			
	LR 40455	accessory, strain relief			CSA C22-2 N.158-1987; E.C.N 584B			





PA268

**DIMENSIONAL
DRAWING**

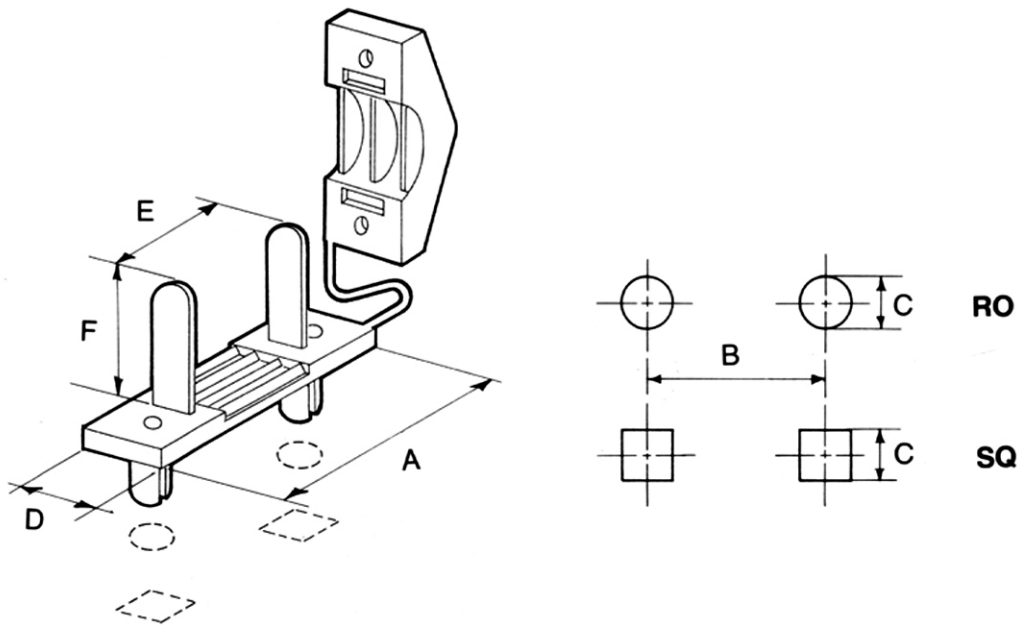

PACKAGING				
Type	P-N	Pack.	Dim. Pack. (LxHxP)	Weight (Kg)
PA 268 RO	970642	2000	40x39x40	13
PA 268 SQ	970643	2000	40x39x40	13

