




PA309

**Terminal box with integrated
cable clamp and earth bracket.
For snap-in fixing on the chassis**



TECHNICAL DATA


	IEC Standards	American Standards
Versions	3 poles	
Ratings	400V - 16A	300V - 16A
Wire size	1.5 sqmm	18 ÷ 14 AWG
Working Temperature	- 5 ÷ 125°C (short time 155°C)	23 ÷ 221°F
Plastic Material	Polyamide PA6.6 black colour, UL94 V2, GWT 960°C	
Metal Parts	M4 zinc plated steel screw; 6.3 x 0.8 zinc plated steel tab insert; other parts made in zinc plated steel	
Protection degree (IP)	IP 30	
Cable section	3 x 0.75 sqmm ÷ 3 x 1.5 sqmm	
Cable Clamp Screw	3.5 x 15 mm (0.14" x 0.60") HI-LO	

Approvals	File Nr.	Ratings (sqmm/AWG – V – A – T)	Standard References
	EM 357	1.5 sqmm - 400V - 16A – 125°C	EN 60998-1; EN 60998-2-1; EN 61210; EN60335-1
	122361 ÜG	1.5 sqmm - 400V - 16A – 125°C	DIN EN 60335-1, /A12, /A13, /A14; DIN EN 60998-1; DIN EN 60998-2-1; DIN EN 61210 (VDE 0613)



PA309

DIMENSIONAL DRAWING

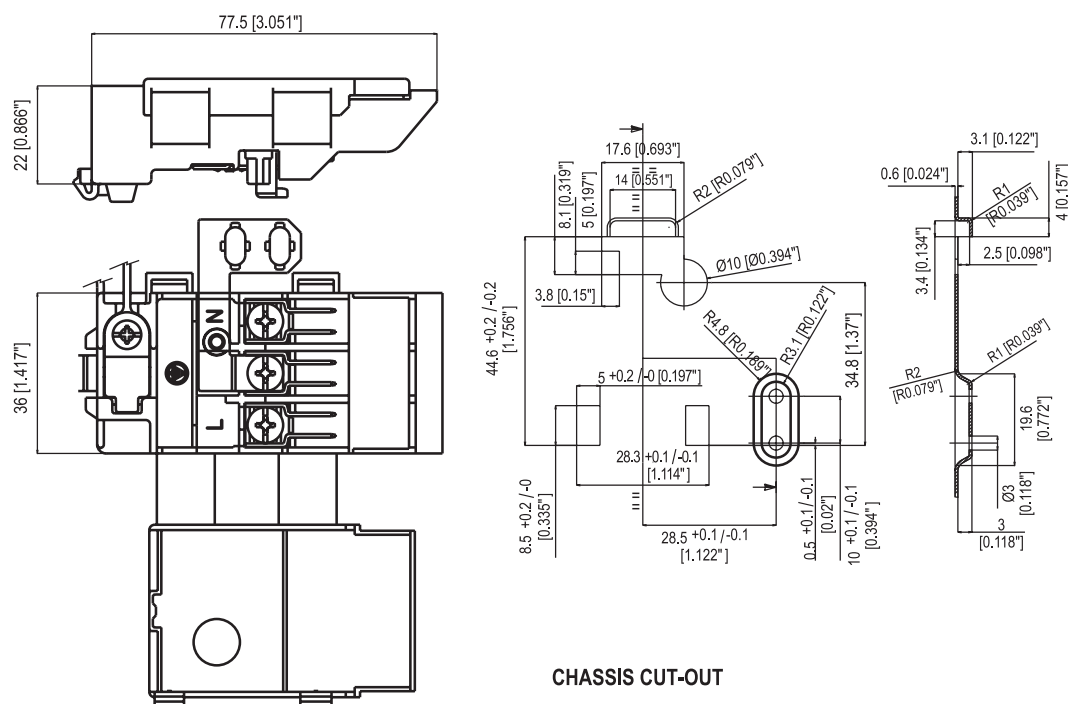

PACKAGING

Type	P-N	Pack.	Dim. Pack. (LxHxP)	Weight (Kg)
PA 309	500550	250	40x39x40	9.3