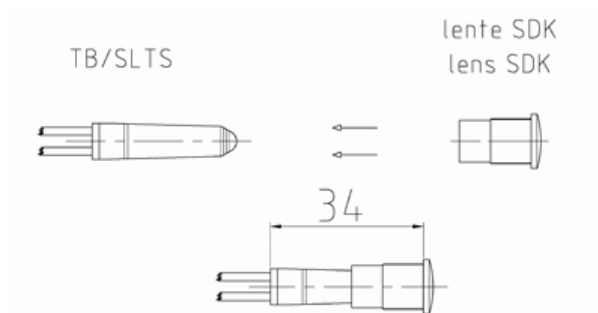**Piris** COMPONENTS

Ø 12mm

TB/SLTS/SDK

YOU CAN REQUEST IT WITH IP65 (TOTALLY WATERPROOF)

Screw locking light indicator.

There is the opportunity to request the lens and the screw assembled or apart (not assembled on the plastic case).

Working voltage	6V ; 12V ; 24V ; 48V ; 110V ; 250V ; 400V
Max temperature	90°C ; 120°C ; 150°C
Hole diameter	12mm +0,25-0
Panel thickness	from 0,5mm to 5mm
Way of locking on the panel	with screw
Lamp type	incandescent lamp ; neon/fluorescent lamp ; LED lamp lamp
Connection way	pvc cable ; silicon cable ; silicon-glass cable
Wire ends	on request
Lens type	suitable for a 12mm hole (lens type: SDK)
Lens – case connection	extractable
Approvals	VDE - UL/CSA - CE