



5HE 7TAKT



TYPICAL APPLICATIONS	Hobs control
WIRING DIAGRAMAS	7 positions
GWFI	850 °C
GWT NO FLAME (<2sec)	750 °C


Rotary switches with different mounting solution available, 7 positions, with electric rating up to 12A. Ideal for hobs control, with a terminal housing conjuncted to the body.

- Standard connecting with single terminals 6,3 mm
- Different mounting solutions available:
snap-in, nuts or screw xing
- 30.000 cycles
- Plastic shafts with different lengths (16 - 31 mm)

RATING


12 A / 400 VAC 30E3
T150 °C
According to EN 61058-1

16 A / 250 VAC
T120 °C
According to UL 61058-1

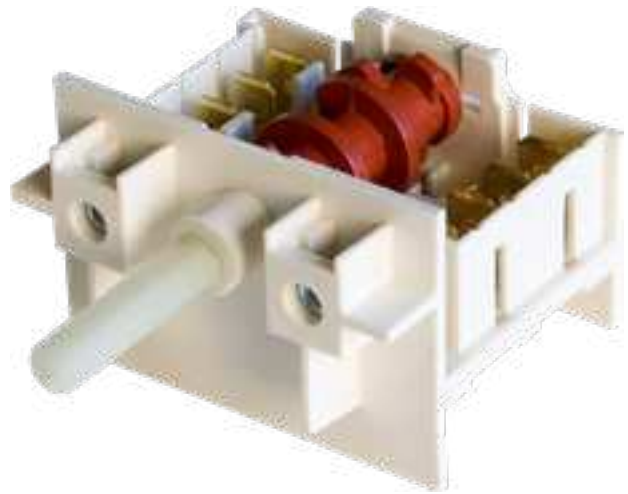


TECHNICAL FEATURES

Rast 6,5 multiple connection.

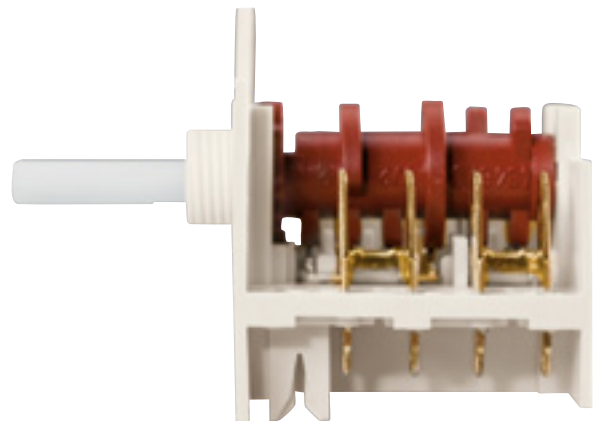

DIMENSIONS

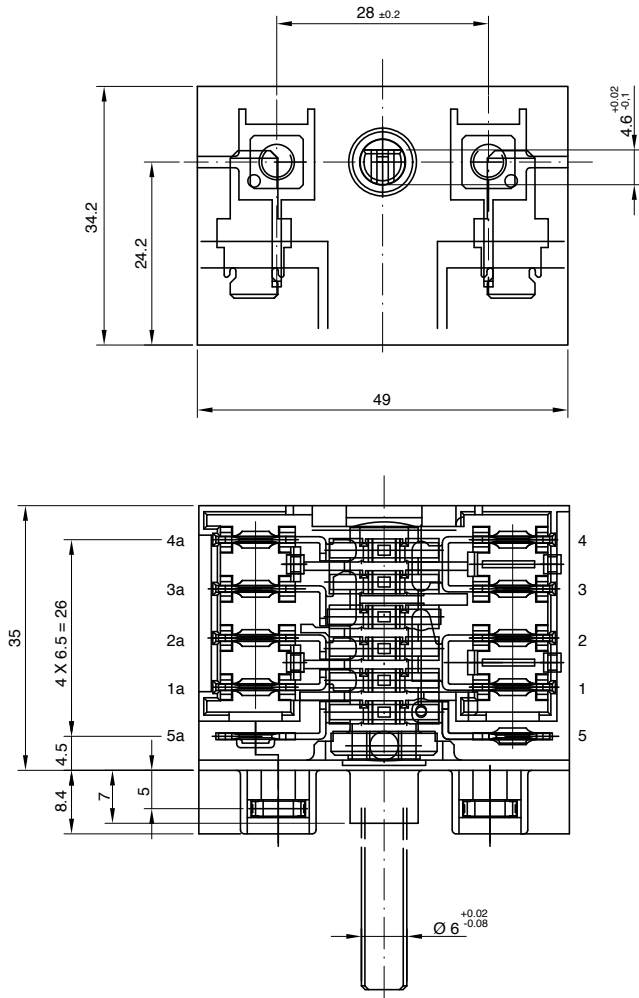

CONTACT SEQUENCE


Pos.	Ang.	P3	P1		P2	
		5a	1a-2a		3a-4a	
		5	1	1	3-3	4
		5	2	2	3-3	4
0	0°					
1	51,4°	■	■	■	■	■
2	102,8°	■		■	■	■
3	154,2°	■		■	■	
4	205,6°	■		■		■
5	257,0°	■			■	■
6	308,4°	■	■			■

SOLUTIONS


Nut Fixing



Screw fixing

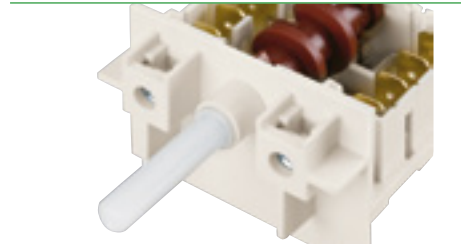

Snap-in fixing

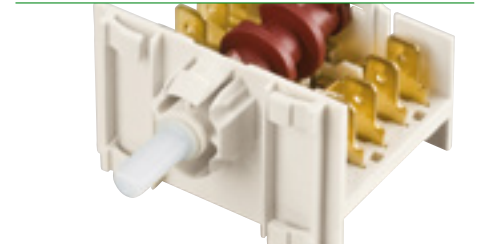

CUT OUT

