


CH

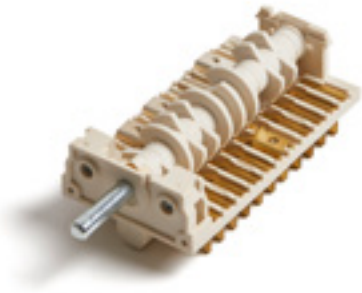


TYPICAL APPLICATIONS	Function selector switch
WIRING DIAGRAMAS	2 - 14 positions
CYCLE No.	Up to 30,000
AMBIENT TEMPERATURE	150 °CW
GWFI	850 °C
GWT NO FLAME (<2sec)	750 °C
ADDITIONAL FEATURES	<ul style="list-style-type: none"> ■ M4 screw mounting ■ 26 contacts version available


Thermostat version available

16 (6) A / 250 VAC - 3E4
16 (8) A / 250 VAC
18 A / 250 VAC - 3E4
12 A / 400 VAC - 3E4
T150 °C
According to EN 61058-1

3/4 HP / 125 VAC
 18 A GP / 250 VAC
 16 (8) A / 250 VAC
 T125 °C
 According to UL 61058-1

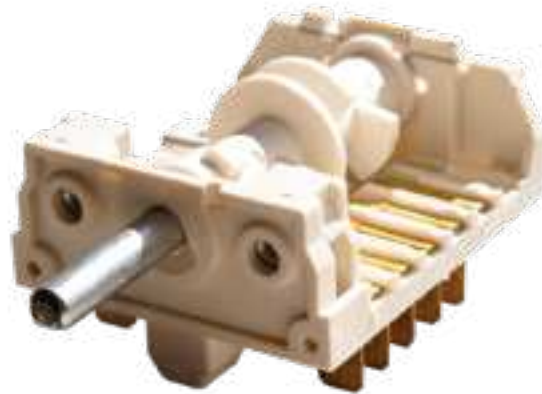

DIMENSIONS

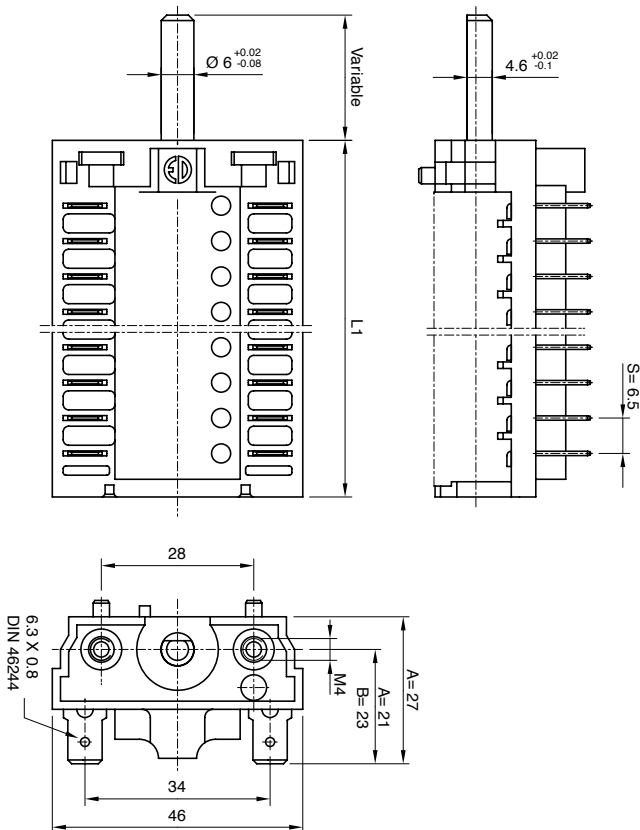

CONTACT SEQUENCE

Type	Basic Version		L1		Version
	Contacts		S=7	S=6.5	
	16(4)/250ac 6(2)/250ac	6(1.5)/250ac			
1-CH	1		29,5*		A
2-CH	2		25	36*	A
3-CH	3		32	33	A
4-CH	4		39	39,5	A, B
5-CH	5		46	46	A
6-CH	6		49,5		A
6-CH	6		53	52,5	A, B
7-CH	7			59	A, B
8-CH	8		67	65,5	A, B
9-CH	9			72	A
10-CH	10		81	78,5	A, B
11-CH	11		88	85	A, B
12-CH	12		95		A
13-CH	8	5	S=7	S=6	A
			97		