


Materiale **PVC** / Poliammide **PA 6.6**
 Innesto in acciaio ramato e nichelato
 Marcatura su richiesta

Material **PVC** / Polyamide **PA 6.6**
 Tab in coppered and nickel plated steel
 Marking on request

OK401L




OK405



OK404



OK400 e OK401

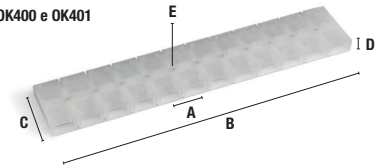

Approvazioni / Approvals



CEI EN 60998-1 / CEI EN 60998-2-1 / CEI EN 61210



T 105°C / UL 486 E

Legenda delle quote
 Legend for dimensions

Descrizione - Description		OK400		OK401	OK401L	OK404	OK405		
Codice / Code		44000.07	44015.07	44100.11	44160.07	44300.07	44390.07		
Innesto / Tab		2,8 x 0,5 mm	2,8 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm		
Codice / Code		44030.07	44045.07						
Innesto / Tab		bandierina a saldare solderable pin							
Materiale / Material		PVC UL94V0 T85°C		PA6.6 UL94V2 T125°C	PVC UL94V0 T85°C	PVC UL94V0 T85°C	PVC UL94V0 T85°C		
		1,5 mm ² - 17,5 A - 450 V		2,5 mm ² - 24 A - 450 V	2,5 mm ² - 24 A - 450 V	2,5 mm ² - 24 A - 450 V	2,5 mm ² - 24 A - 450 V		
		14 AWG - 20 A - 300 V		12 AWG - 20 A - 300 V	12 AWG - 20 A - 300 V	12 AWG - 20 A - 300 V	12 AWG - 20 A - 300 V		
Numero di poli / Number of poles		12		1 ÷ 12	12 (2 x 6)	1 ÷ 12	1 / 2		
A	Passo / Pitch	8,3 mm		12,5 mm	23 mm	12,5 mm	9 mm		
B	Lunghezza / Length	101 mm		149,5 mm	137 mm	149 mm	48,5 mm		
C	Larghezza / Width	20 mm		28 mm	50 mm	50 mm	21 mm		
D	Altezza / Height	6 mm		7,5 mm	7,5 mm	7,5 mm	8,5 mm		
E	Ø Foro di fissaggio / Fixing hole	2,6 mm		3,2 mm	3,2 mm	3,2 mm	2,6 mm		
Imballo / Box		1000 pz. / pcs.	1350 pz. / pcs.	1p 4000 4p 800 12p 600	2p 2000 6p 700 8p 500	360 pz. / pcs.	1p 2000 4p 600 12p 300	2p 1200 6p 400 8p 250	1500 pz. / pcs.